
FAtec

Hec AM900 Non-Overcenter Aerial Device



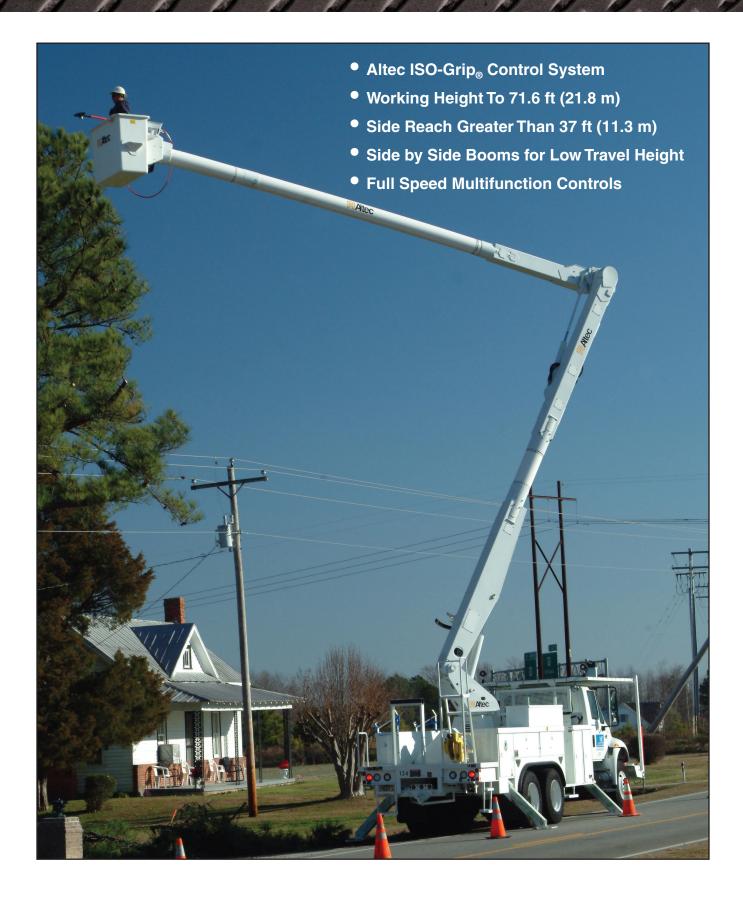

Altec AM900 Specifications

STANDARD FEATURES

- Altec ISO-Grip® Control System
- Working Height To 71.6 ft (21.8 m)
- Side Reach To 37.4 ft (11.4 m)
- Pressure and Flow Compensated, Pilot Operated Hydraulic System
- Insulated, ANSI Category B, 46kV & Below
- Personnel Lift
- Lower Boom Insulator
- Continuous Rotation
- Boom Storage Protection System
- Two-Man End Mounted Platform
- A-Frame Outriggers 2 Sets
- Lower Controls
- Leakage Collector Test Band
- Open/Closed Center Tool Capability
- Compact Boom End
- Lifetime Structural Warranty
- Outrigger Motion Alarm
- Outrigger Boom Interlock System
- Back-Up Alarm

GENERAL SPECIFICATIONS		
Height to Bottom of Platform*		
End-Mounted	66.6 ft	20.3 m
Working Height*		
End-Mounted	71.6 ft	21.8 m
Reach from Centerline of Rotation,		
Maximum	37.2 ft	11.3 m
Stowed Travel Height*	10.6 ft	3.2 m
Rotation - Continuous	360°	360°
Platform Capacity		
Single Two-Man, End-Mounted	700 lb	317.5 kg
Lower Boom Articulation	91°	
Upper Boom Articulation	162°	
Lower Boom Fiberglass Isolation	30 in	762 mm
Upper Boom Isolation, Min.	21.4 ft	6.5 m

^{*}Based on 40 inch (1016 mm) chassis frame height.

Altec Aerial Devices meet or exceed all applicable ANSI Standards as of the date of manufacture. Altec reserves the right to improve models and change specifications without notice or obligation.


OPTIONS

- · ANSI Category C or A
- Emergency Operating System Tool Circuit at Tailshelf
- Radial Outriggers
 - Engine Start/Stop

RECOMMENDED FEATURES

- Fall Protection System
- Platform Cover
- Platform Liner
- Wheel Chocks

REACH DIAGRAM

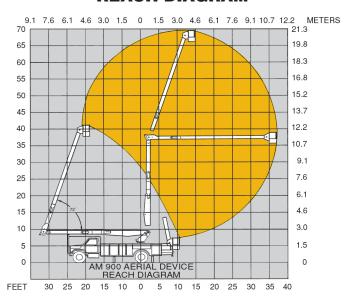



Low Stow Travel Height

Altec Sales and Service



Post Office Box 10264
Birmingham, Alabama 35202
Phone 205/991-7733

Altec Industries, Inc.

Phone 205/991-7733 Fax 205/991-9993