
FAtec

Altec AT40M/P Articulating Telescopic Aerial Device

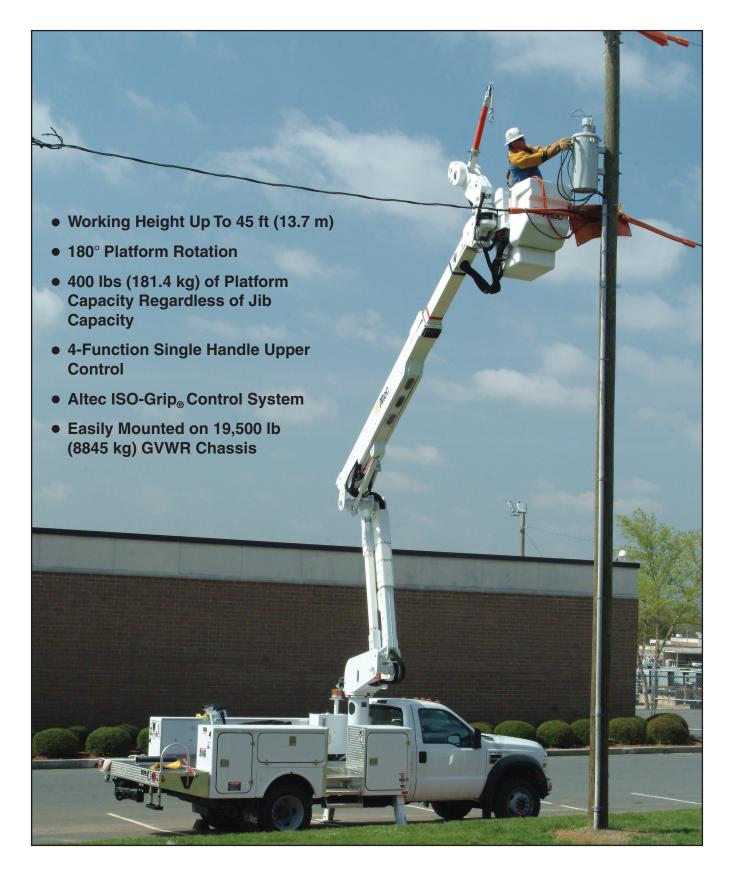

Altec

Altec AT40M/P Specifications

STANDARD FEATURES

- Altec Arm Jib
- Fiberglass Upper Boom and Lower Boom Insulator
- Insulated, ANSI Category C, 46KV and Below
- Compensated Articulating Arm
- Continuous Rotation
- Hydraulic Boom Extension
- Hydraulic Platform Rotation and Tilt
- Full Pressure, Open Center Hydraulic System
- Outrigger Motion Alarm and Outrigger Interlocks
- Platform Access From Ground
- Emergency Stop Valves at All Upper and Lower Control Stations
- Platform 24 x 30 x 42 in Nominal
- Tool Circuit at Platform
- Extension Dependent Load Chart
- Jib Capacity Up To 800 lbs (362.9 kg)

GENERAL SPECIFICATIONS

	AT40M		AT40P	
Ground to Bottom of Platform	40.0 ft	12.2 m	40.0 ft	12.2 m
Working Height	45.0 ft	13.7 m	45.0 ft	13.7 m
Maximum Side Reach	30.8 ft	9.4 m	30.8 ft	9.4 m
(@ Platform Height)	16.5 ft	5.0 m	16.5 ft	5.0 m
Stowed Travel Height Approx	10.3 ft*	(3.14 m)	10.3 ft*	(3.14 m)
Platform Capacity	400 lbs	(181.4 kg)	600 lbs	(272.2 kg)
Upper Boom Isolation Gap	38 in	965 mm	38 in	965 mm
Articulating Arm Isolation Gap	9.5 in	241 mm	9.5 in	241 mm
Lower Boom Articulation	-25° to 75°		-25° to 75°	
Articulation Arm Articulation	-3° to 74° -3° to 74°			
Rotation	Continuous			

* Based on 40 in (1016 mm) chassis



Sales: 800-958-2555 Service: 877-GO ALTEC

RECOMMENDED FEATURES

• Fall Protection System


•

- Platform Liner
- Wheel ChocksOutrigger Pads

OPTIONS

- 2-Man Platform with 180° Rotation and 600 lb (272.2 kg) Platform Capacity – Material Handling is Not Available in This Configuration
- Secondary Stowage System
- Engine Start /Stop
- Second Tool Circuit at Platform
- Tool Circuit Below Rotation
- Manual Throttle
- Jib Adapter
- Phase Lifting Jib Attachment
- Platform Covers







Altec Industries, Inc. 210 Inverness Drive Birmingham, Alabama 35242 Phone 205/991-7733 Fax 205/408-8051 sales@altec.com

Manufacturing and Service Facilities Located Throughout the United States and Canada www.altec.com