

FELLING TRAILERS

DROP-DECK TILT TRAILERS

Utility Pan Tilt, IT-I Tilt Series, IT-E Tilt Series

FT-7 T-1



FT-10 T



FT-12 IT-E



The **FELLING** Style
Quality ~ Craftsmanship ~ Pride



DDT-102

Since 1974


PAN TILT SERIES

SINGLE AXLE

- Load capacities ranging from 1,800 lbs. to 6,400 lbs.
- Loaded deck height 14"
- Deck width 96" OD, 74" ID
- Fabricated steel pan sides, 6" to 8"

Definition - Drop-Deck Pan Tilt (Single Axle) trailer constructed of a structural channel tongue, fabricated steel pan sides and channel crossmembers.

- 18" Approach Plate
- Approximate Load Angle:
FT-3 T - 13°, FT-6 T - 11°, FT-7 T - 9°
- Tie Downs: FT-3 T (2) Corner Ties, (4) D-rings
FT-6 T & FT-7 T (2) Corner Ties, (6) D-rings
- LED lights with sealed wiring harness

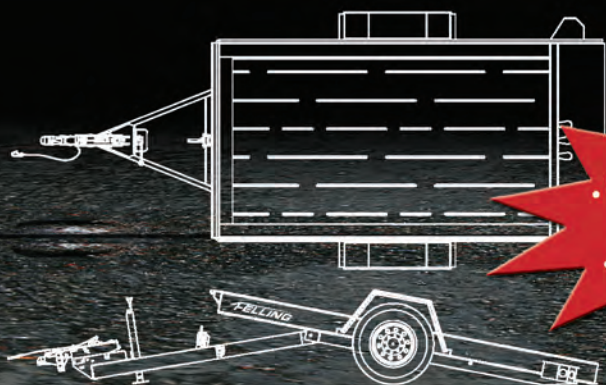

FT-3 T

PAN TILT SERIES

TANDEM AXLE



- Load capacities ranging from 7,380 lbs. to 16,000 lbs.
- Loaded deck height 14" (FT-10 T)
15" (FT-12 T - FT-16 T)
- Deck width 102" OD, 79" ID, (78" on FT-16 T)
- Fabricated steel pan sides, 10" to 12"
- 18" Approach Plate

Definition - Drop-Deck Pan Tilt (Tandem Axle) trailer constructed of a structural channel tongue, fabricated steel pan sides and channel crossmembers.

- Approximate Load Angle:
FT-10 T - 8°
FT-12 T - FT-16 T 7°
- Tie Downs: (2) Corner Ties, (6) D-rings
- LED lights with sealed wiring harness



FT-12 T

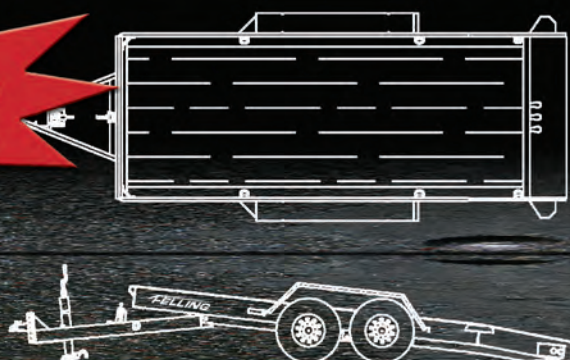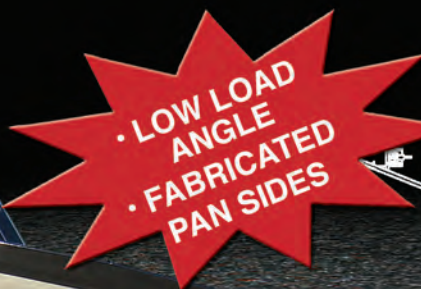

FELLING

**DECKING
OPTIONS**

**DROP-DECK
TILT SERIES**


Wood
(Pressure Treated, White Oak & Angelim)



Floor Plate



Expanded Metal

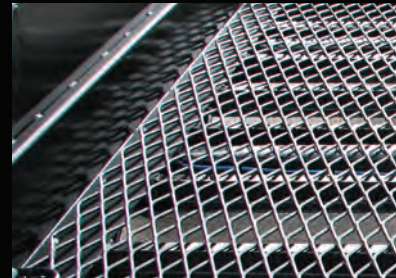


IT-I TILT SERIES

Definition - Drop-Deck Tilt trailer constructed of a Cold Formed I-beam main frame and Jr. I-beam crossmembers. A single frame design.

- Load capacities ranging from 7,380 lbs. to 20,000 lbs.
- Loaded deck height 22" - 24.5"
- (2) Cold Formed I-beams create a clean and strong single frame design

- Punch Plate Approach
- Deck width 102" OD, 82" ID (83" ID - FT-15 IT-I, 81" ID - FT-16 IT-I)
- Tie Downs: (8) D-rings, (10) D-rings with Stationary Deck
- LED lights with sealed wiring harness

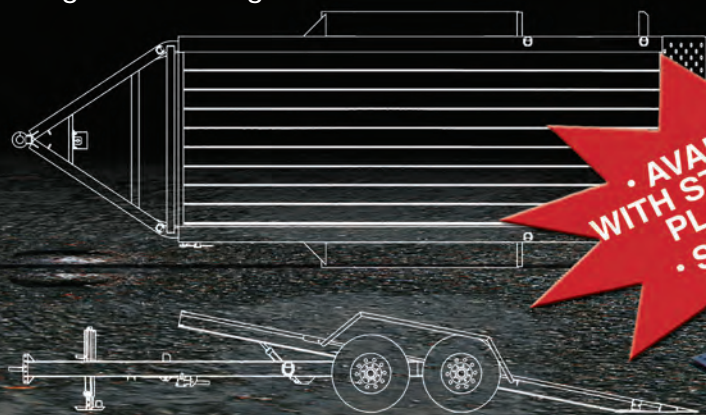

• AVAILABLE
WITH STATIONARY
PLATFORM
• STANDARD
DESIGN



FT-15 IT-I

IT-E TILT SERIES

Definition - Drop-Deck Tilt trailer constructed of a heavy duty structural channel frame with a stacked hitch design and Jr. I-beam crossmembers. A frame within a frame design.

- Load capacities ranging from 7,380 lbs. to 16,000 lbs.
- Loaded deck height 22" - 23"
- Deck width 102" OD, 81" ID
- Approximate Load Angle: 13°

- Tie Downs: (8) D-rings, (10) D-rings with Stationary Deck
- LED lights with sealed wiring harness



FT-16 IT-E

• AVAILABLE
WITH STATIONARY
PLATFORM
• CLASSIC
DESIGN



Rumber

Smooth Steel

Smooth Steel
(with Anti-skid)

Stationary Deck
(Length & Material Vary)



****HOT DIP GALVANIZING AVAILABLE ON ALL MODELS****

Drop-Deck Tilts Standard Specifications	Deck Length (starting at)	Deck Width	Trailer Weight (approx.)	Deck Height (loaded)	Frame	Crossmembers	Wheels & Tires	Cushion Cylinder	Load Angle (approx.)	Jack	GVWR (lbs.)	
Single Axle: Pan Tilts												
FT-3	Pan	10' (3 m.)	96" OD, 74" ID	1,100 lbs. / 499 kg.	14" (35 cm.)	6" Pan Sides	3" Jr. I	ST205/75R15 C, 5 bolt	Optional	13°	7K	2,900 lbs.
FT-6	Pan	12' (3.65 m.)	96" OD, 74" ID	1,650 lbs. / 748 kg.	14" (35 cm.)	8" Pan Sides	3" Jr. I	ST235/80R16 E, 8 bolt	Optional	11°	7K	7,000 lbs.
FT-7-1	Pan	14' (4.2 m.)	96" OD, 74" ID	1,800 lbs. / 816 kg.	14" (35 cm.)	8" Pan Sides	3" Jr. I	ST235/80R16 E, 8 bolt	Optional	9°	7K	8,200 lbs.
Tandem Axle: Pan Tilts • IT-I Tilts • IT-E Tilts												
FT-10	Pan	16' (4.87 m.)	102" OD, 79" ID	2,600 lbs. / 1,179 kg.	14" (35 cm.)	5" Struc. Chan. / 10" Pan Sides	4" & 3" Jr. I / Chan.	ST225/75R15 D, 6 bolt	Optional	8°	7K	9,980 lbs.
	IT-I	16' (4.87 m.)	102" OD, 82" ID	2,600 lbs. / 1,179 kg.	22" (55 cm.)	6" I-Beam	3" Jr. I	ST225/75R15 D, 6 bolt	Single	13°	7K	9,980 lbs.
	IT-E	16' (4.87 m.)	102" OD, 81" ID	2,600 lbs. / 1,179 kg.	22" (55 cm.)	6" Struc. Chan.	3" Jr. I/Chan.	ST225/75R15 D, 6 bolt	Single	13°	7K	9,980 lbs.
FT-12	Pan	18' (5.49 m.)	102" OD, 79" ID	3,200 lbs. / 1,451 kg.	15" (38 cm.)	6" Struc. Chan. / 10" Pan Sides	4" & 3" Jr. I / Chan.	ST235/80R16 E, 8 bolt	Optional	7°	12K	15,200 lbs.
	IT-I	16' (4.87 m.)	102" OD, 82" ID	3,200 lbs. / 1,451 kg.	22" (55 cm.)	6" I-Beam	3" Jr. I	ST235/80R16 E, 8 bolt	Single	13°	12K	15,200 lbs.
	IT-E	16' (4.87 m.)	102" OD, 81" ID	3,200 lbs. / 1,451 kg.	22" (55 cm.)	7" Struc. Chan.	3" Jr. I / Chan.	ST235/80R16 E, 8 bolt	Single	13°	12K	15,200 lbs.
FT-14	Pan	18' (5.49 m.)	102" OD, 79" ID	3,450 lbs. / 1,565 kg.	15" (38 cm.)	6" Struc. Chan. / 12" Pan Sides	4" & 3" Jr. I / Chan.	ST235/80R16 E, 8 bolt	Optional	7°	12K	17,450 lbs.
	IT-I	16' (4.87 m.)	102" OD, 82" ID	3,450 lbs. / 1,565 kg.	22" (55 cm.)	6" I-Beam	3" Jr. I	ST235/80R16 E, 8 bolt	Dual	13°	12K	17,450 lbs.
	IT-E	16' (4.87 m.)	102" OD, 81" ID	3,450 lbs. / 1,565 kg.	22" (55 cm.)	8" Struc. Chan.	4" & 3" Jr. I	ST235/80R16 E, 8 bolt	Dual	13°	12K	17,450 lbs.
FT-15	IT-I	16' (4.87 m.)	102" OD, 83" ID	3,600 lbs. / 1,632 kg.	23" (58 cm.)	8" I-Beam	4" Jr. I	215/75R17.5 H, 8 Bolt	Dual	13°	12K	18,000 lbs.
FT-16	Pan	20' (6 m.)	102" OD, 78" ID	3,600 lbs. / 1,632 kg.	15" (38 cm.)	6" Struc. Chan. / 12" Pan Sides	4" & 3" Jr. I / Chan.	215/75R17.5 H, 8 Bolt	Optional	7°	12K	19,600 lbs.
	IT-I	16' (4.87 m.)	102" OD, 81" ID	3,600 lbs. / 1,632 kg.	23" (58 cm.)	8" I-Beam	4" Jr. I	215/75R17.5 H, 8 Bolt	Dual	13°	12K	19,600 lbs.
	IT-E	16' (4.87 m.)	102" OD, 81" ID	3,600 lbs. / 1,632 kg.	23" (58 cm.)	8" Struc. Chan.	4" Jr. I / Chan.	215/75R17.5 H, 8 Bolt	Dual	13°	12K	19,600 lbs.
FT-20	IT-I	20' (6.1 m.)	102" OD, 81" ID	3,800 lbs. / 1,723 kg.	24.5" (62 cm.)*	10" I-Beam	4" Jr. I	235/75R17.5 H, 8 Bolt	Dual	13°	12K	23,800 lbs.
*With optional drop torsion axle												

*With optional drop torsion axle.

CUSTOMIZATION: *Definition* - To modify or build according to individual or personal specifications or preference.

Felling Trailers believes that **"It's All In The Details"** when it comes to building a trailer. We build trailers to accommodate your equipment and to suit your needs, right down to the last detail. The options and features are limitless...contact Felling Trailers to design the trailer that is right for you.

Your **FELLING TRAILERS** Dealer:

Join Us Online



FELLING TRAILERS

Manufactured & Distributed by: **Felling Trailers, Inc.**
1525 Main St. S. • Sauk Centre, MN 56378
(320) 352-5239 • (320) 352-5230 FAX

Visit us online at **www.felling.com**

E-mail us at: **trailers@felling.com**

Call 1-800-245-2809

for your nearest dealer.



©2014 Felling Trailers, Inc. Form No. DDT-102 2/14 Printed in U.S.A.