



Dimension

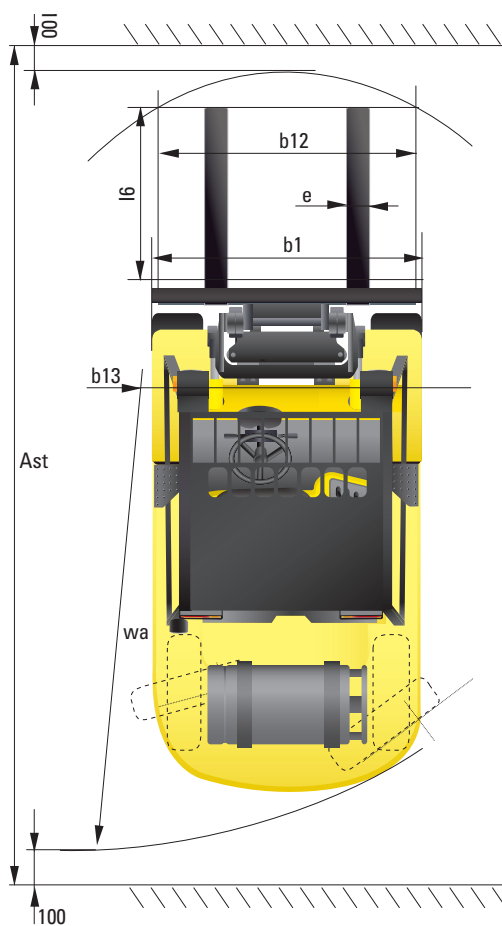

Specification

Identification					
1.1	Manufacturer	Hyundai	Hyundai	Hyundai	Hyundai
1.2	Manufacturer's type designation	35L-7A	40L-7A	45L-7A	50L-7A
1.3	Drive: electric (battery or mains), diesel, petrol, fuel gas, manual	LP / GAS	LP / GAS	LP / GAS	LP / GAS
1.4	Type of operation: hand, pedestrian, standing, seated, order-picker	seated	seated	seated	seated
1.5	Load capacity / rated load	Q (lb)	7,700	8,800	9,900
1.6	Load center distance	c (in)	24	24	24
1.8	Load distance, center of drive axle to fork	x (in)	17	17	17
1.9	Wheelbase	y (in)	78.7	78.7	78.7
Weights					
2.1	Service weight	lb	12,645	13,558	14,474
2.2	Axle loading, loaded front/rear	lb	18,326 / 2,019	20,006 / 2,352	21,760 / 2,613
2.3	Axle loading, unloaded front/rear	lb	6,155 / 6,490	6,098 / 7,460	6,114 / 8,360
Wheels, Chassis					
3.1	Tires: solid rubber, superplastic, pneumatic, polyurethane	Pneumatic / Solid rubber	Pneumatic / Solid rubber	Pneumatic / Solid rubber	Pneumatic / Solid rubber
3.2	Tires size, front (width x Φ)		8.25 x 15 x 14pr	7.50 x 16 x 12pr	7.50 x 16 x 12pr
3.3	Tires size, rear (width x Φ)		7.00 x 12 x 12pr	7.00 x 12 x 12pr	7.00 x 12 x 14pr
3.5	Wheels, number front x rear (x=driven wheels)		2 x 2	4 x 2	4 x 2
3.6	Track width, front	b10 (in)	44.6	50.5	50.5
3.7	Track width, rear	b11 (in)	45	45	45
Basic Dimensions					
4.1	Mast / fork carriage tilt forward / backward (α / β)	degrees	8 / 10	8 / 10	8 / 10
4.2	Lowered mast height	h1 (in)	88	87.4	87.4
4.3	Free lift	h2 (in)	4.7	4.7	4.7
4.4	Lift height	h3 (in)	119	119	115
4.5	Extended mast height	h4 (in)	166.3	166.3	166.7
4.7	Overhead load guard (cab) height	h5 (in)	88	88	88
4.8	Seat height / standing height	h7 (in)	43	43	43
4.12	Coupling height	h10 (in)	8.9	8.9	8.9
4.19	Overall length	l1 (in)	163	165	173
4.20	Length to face of forks	l2 (in)	121	123	128
4.21	Overall width	b1 (in)	54	69	69
4.22	Fork dimensions	s / e / l (in)	2 / 4.8 / 42	2 / 5.9 / 42	2 / 5.9 / 48
4.23	Fork carriage ISO 2328, class / type A,B		III / A	III / A	IV / A
4.24	Fork-carriage width	b12 (in)	51.2	63	63
4.31	Ground clearance, loaded, under mast	m1 (in)	6.7	6.1	6.1
4.32	Ground clearance, centre of wheelbase	m2 (in)	7.8	7.8	7.8
4.33	Aisle width for pallets 1000x1200 crossways	Ast (in)	179.8	181.9	183.7
4.34	Aisle width for pallets 800x1200 lengthways	Ast (in)	187.7	188.8	191.6
4.35	Turning radius	Wa (in)	110.5	112.6	114.4
4.36	Smallest pivot point distance	b13 (in)	39.7	39.7	39.7
Performance Data					
5.1	Travel speed, Unloaded	mph	14.8	14.2	14.2
5.2	Lift speed, Loaded/Unloaded	fpm	100 / 104	100 / 104	87 / 90
5.3	Lowering speed, Loaded/Unloaded	fpm	98 / 89	98 / 89	98 / 89
5.5	Drawbar pull, Loaded	lb	8,823	8,962	8,664
5.7	Gradient performance, Loaded	%	40.5	36.2	31.6
5.10	Service brake		Hydraulic	Hydraulic	Hydraulic
Engine					
6.1	Engine manufacturer / type		GM 4.3L	GM 4.3L	GM 4.3L
6.2	Engine power acc. to ISO 1585	HP	95	95	95
6.3	Rated speed	1/min	2,300	2,300	2,300
6.4	No. of cylinder / cubic capacity	/cm ³	6 / 4,294	6 / 4,294	6 / 4,294
Other Details					
8.2	Type of drive control		Power Shift	Power Shift	Power Shift
8.3	Operating pressure	bar	225 / 168	225 / 168	225 / 168
8.4	Oil volume	l/min	30	30	30
8.5	Noise	db(A)	80	80	80

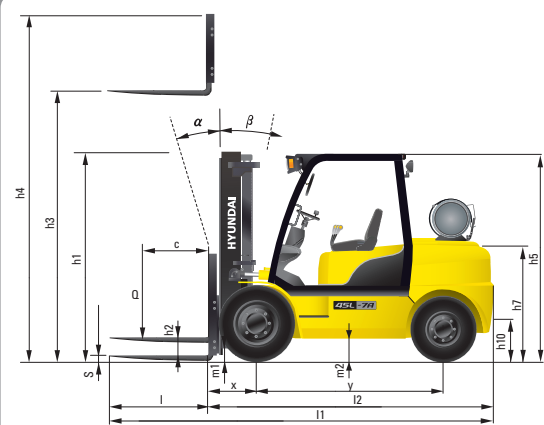

Some of the photos may include optional equipment.

North America Only

HYUNDAI LPG FORKLIFT TRUCKS **Applied Tier 4 Engine**

35L/40L/45L/50L-7A

HYUNDAI FORKLIFT
HEAVY INDUSTRIES CO.,LTD.

Head Office(Sales Office)
14th FL., HYUNDAI BLDG. 140-2, KYE-DONG, JONGNO-GU, SEOUL, KOREA 110-793
Tel (82) (2) 746-4526, 4529 Fax (82) (2) 746-7444-7445

Americas Operation : Hyundai Construction Equipment Americas, Inc.
955 ESTES AVENUE, ELK GROVE VILLAGE IL., 60007 Tel (1) 847-437-3333 Fax (1) 847-437-3574

Europe Operation : Hyundai Heavy Industries Europe N.V.
VOSSENDAAL 11, 2440 GEEL, BELGIUM Tel (32) 14-56-2200 Fax (32) 14-59-3405

PLEASE CONTACT

www.hyundai-ce.com

2010. 06 Rev 0.

HYUNDAI
HEAVY INDUSTRIES CO.,LTD.

We build a better future

NEW criteria of Forklift Trucks

Hyundai introduces a new line of 7A series
LPG forklift trucks.
Excellent power and performance make your
business more profitable.



■ Some of the photos may include optional equipment.



OPSS (Operator Presence Sensing System)

Control of mast tilting, lifting and lowering is not possible through operation of the appropriate control when the operator is not in the seated position.

The new master on the job-site!

Smooth running, efficient and ergonomically designed, 35/40/45/50L-7A series are made to meet your needs.

95HP/2,300rpm

Powerful Engine GM 4.3L V6 Engine


Market approved quality of GM 4.3L V6 engine ensures incomparable performance, durability and additional value to the machine. Powerful and efficient engine provides excellent fuel economy and excellent torque for improved operation.
(EPA/CARB Tier-IV Certified)

Fast and Stable Performance

Being able to quickly raise and lower the mast, as well as tilt it forward and backward, provides the best operational conditions during unloading.
When the truck is fully loaded, mast lowering speed is carefully controlled to ensure safety by the down control valve.
Mast(Lift and Tilt) Look System is standard.



■ Some of the photos may include optional equipment.

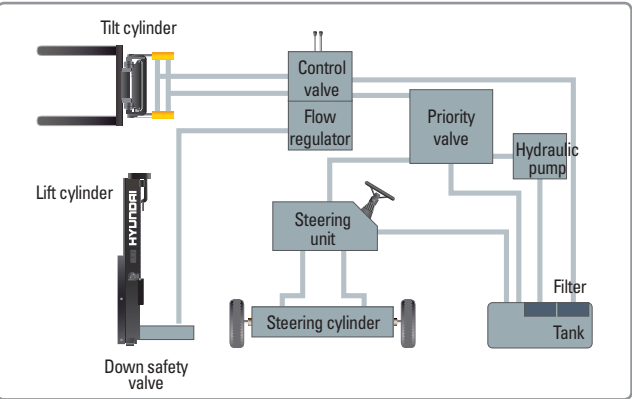

State-of-the-art Hydraulic System

The latest large-capacity hydraulic system reacts quickly during operation, and a low-noise control valve increases both efficiency and durability.



Fully Hydrostatic Power Steering

A hydraulic steering system always guarantees smooth and flexible steering, preventing overrun and kick-back.



Increased Mast Tilting Angle

Utilizing the mast tilting angle of 8 degrees forward and 10 degrees backward, the operator can safely and rapidly perform loading and unloading jobs.

Faster Travel Speed & Better Gradability

The powerful high-output engine provides greater acceleration, better gradability and faster travel speed on any tough terrains or slopes.



Gradability(Loaded)

35L-7A : 40.5%	45L-7A : 31.6%
40L-7A : 36.2%	50L-7A : 28.7%

Travel Speed(Unloaded)

35L-7A : 14.8 mph
40L-7A : 14.2 mph
45L-7A : 14.2 mph
50L-7A : 14.2 mph



Ergonomic operator friendly compartment design!

A design based on human engineering relieves fatigue and increases operator’s efficiency.

Operator Friendly Gauges and Water-resistant Monitor Panel



- ❶ Parking brake lamp

❷ Turn lamp

❸ Engine oil warning lamp

❹ Transmission oil temperature warning lamp

❺ Battery charging warning lamp

❻ Air cleaner filter warning light
- ❼ Working light indicator

❽ Seat belt warning

❾ Water temperature gauge

❿ OPS warning (option)

⓫ Hour meter

⓬ Engine check lamp




Full Suspension Seat
An attractive and adjustable seat, based on a human engineering design, provides great comfort, safety and durability.



New High Visibility for Safe Operation
The operator is able to work with increased safety and accuracy due to a wider view mast.



■ Some of the photos may include optional equipment.

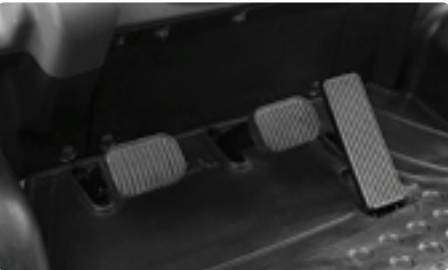

Ergonomically Positioned Pedals
Based on human engineering, the accelerator, brake and inching pedals are optimally positioned for convenience while operating the equipment.



Cup Holder & Console Box
Additional storage spaces are located inside the operating space for operator's convenience.



Quick Response of Operating Control Levers
Only minimal operator's effort is required for precise, safe and productive control.



Adjustable Steering Wheel
Steering wheel with horn button can be adjusted by a lever on the right-hand side for the most comfortable operator position.



Easy and Safe Shift Lever
A single lever on the left side of the steering column gives the operator fast, easy control of direction. The lever must be in the neutral position before the engine can be started.



Secondary Horn
Secondary Horn gives access to lights and horn



Danger-free through high durability!

Safety and durability are priorities in design of the equipment.



Strong Overhead Guard

The safety overhead guard meets ISO 6055 regulation and protects the operator during hazardous jobs.



Parking brake

Ratchet type parking brake requires less effort the operator to set.

Highly Durable Split type Drive Axle

The planetary reduction drive axle smoothly delivers desired torque to the drive wheels.



■ Some of the photos may include optional equipment.



Large Footboard & Hand Grip

Wide "open" step offers convenience and safety when entering and exiting truck.



Expansion Bellows

The expansion bellows absorbs vibration and reduces noise generated from the exhaust system and also extends the life cycle of exhaust system.



Electrically Monitored Air Filter

Air cleaner sensor alerts the operator of a restricted air filter and allows replacement before damage.



Heavy Duty Single Unit Frame

Heavy duty single unit type frame, designed on the basis of accurate structural analysis, guarantees durability and safety.




Bright, Protected Headlights

Bright, Protected head lights are positioned for exceptional visibility.



Ground Clearance

The engine and transmission are assembled horizontally and positioned high in the frame to protect major components during operation on rugged surface.





Designed for quick and easy service!

An ideal arrangement of component parts ensures easy access and convenience for maintenance.



Easy Change Air Cleaner

The air filter is readily accessible for cleaning or replacement. (6inch Cyclone Type)



Fast Service Access for Daily Fluids Check



Easy access of electrical Components

Various electric parts are centralized in dash board resulting in improvement in maintenance.




Easy Maintenance Oil Check

The T/M oil level can be checked easily without any disassembly.




Brake Fluid Reservoir

Highly visible, easily accessible reservoir makes for quicker daily inspections.



An Accessible, Compact Fuse Box for Easy Inspection



Rotational Battery Installation



Aluminum Radiator with Superb Protection Against heat



Removable Side Panels for Ease of Service


Mast Specification

Mast Type		Maximum Fork Height (in)	Overall Height Lowered (in)		Free Lift Height (in)				Tilt Angle (deg)	Load Capacity without side shift at 24 in LC (lb)								Load Capacity with side shift at 24 in LC (lb)								Truck Weight (Unloaded) (lb)								
			Single Tire	Double Tire	With Backrest	Without Backrest	Single Tire				Double Tire				Single Tire				Double Tire				Single Tire				Double Tire							
							35L/40L 45L/50L-7A	35L/40L 45L/50L-7A		35L/40L 45L-7A	35L/40L 45L-7A	35L-7A	40L-7A	45L-7A	50L-7A	35L-7A	40L-7A	45L-7A	50L-7A	35L-7A	40L-7A	45L-7A	50L-7A	35L-7A	40L-7A	45L-7A	50L-7A	35L-7A	40L-7A	45L-7A	50L-7A			
		35L/40L 45L-7A	50L-7A	35L/40L 45L/50L-7A	35L/40L 45L/50L-7A	35L/40L 45L-7A	35L/40L 45L-7A	35L-7A		40L-7A	45L-7A	50L-7A	Fwd/Bwd	35L-7A	40L-7A	45L-7A	50L-7A	35L-7A	40L-7A	45L-7A	50L-7A	35L-7A	40L-7A	45L-7A	50L-7A	35L-7A	40L-7A	45L-7A	50L-7A					
		35L/40L 45L-7A	50L-7A	35L/40L 45L/50L-7A	35L/40L 45L/50L-7A	35L/40L 45L-7A	35L/40L 45L-7A	35L-7A	40L-7A	45L-7A	50L-7A	Fwd/Bwd	35L-7A	40L-7A	45L-7A	50L-7A	35L-7A	40L-7A	45L-7A	50L-7A	35L-7A	40L-7A	45L-7A	50L-7A	35L-7A	40L-7A	45L-7A	50L-7A						
2-Stage Limited Free Lift	V270	107.1	103.5	82.1	81.5	4.7	4.7	4.7	4.7	8/10	7700	8800	9900	11000	7700	8800	9900	11000	7700	8800	9900	11000	7700	8800	9900	11000	12239	13259	14168	15193	12580	13493	14408	15440
	*V300	118.9	115.4	88.0	87.4	4.7	4.7	4.7	4.7	8/10	7700	8800	9900	11000	7700	8800	9900	11000	7700	8800	9900	10890	7700	8800	9900	10890	12305	13325	14234	15248	12646	13559	14474	15495
	V330	130.7	127.2	93.9	93.3	4.7	4.7	4.7	4.7	8/10	7700	8800	9900	11000	7700	8800	9900	11000	7700	8800	9790	10670	7700	8800	9790	10670	12388	13409	14318	15303	12729	13642	14557	15550
	V350	138.6	135.0	99.8	99.2	4.7	4.7	4.7	4.7	8/10	7700	8800	9900	11000	7700	8800	9900	11000	7590	8690	9680	10560	7590	8690	9680	10560	12439	13460	14368	15358	12780	13693	14608	15605
	V370	146.5	142.9	103.7	103.1	4.7	4.7	4.7	4.7	8/10	7700	8800	9900	11000	7700	8800	9900	11000	7480	8580	9570	10450	7480	8580	9460	10450	12483	13504	14412	15396	12824	13737	14652	15619
	V400	158.3	154.7	112.0	111.4	4.7	4.7	4.7	4.7	8/10	7700	8800	9900	10780	7700	8800	9900	11000	7370	8360	9350	10230	7370	8360	9350	10230	12577	13598	14507	15473	12916	13831	14744	15710
2-Stage full Free Lift	V450	178.0	174.4	121.9	121.3	4.7	4.7	4.7	4.7	8/6	7590	8580	9570	10450	7590	8690	9570	10560	7150	8140	9130	9790	7150	8140	9130	9790	12824	13845	14753	15699	13185	14078	14993	15946
	V500	197.6	194.1	131.7	131.1	4.7	4.7	4.7	4.7	8/6	7370	8250	9240	10120	7370	8470	9350	10230	6930	7810	8800	9460	6930	7920	8890	9570	12936	13957	14865	15792	13277	14190	15105	16038
	VF280	110.4	106.2	84.1	83.5	49.5	35.6	36.2	48.1	8/8	7700	8800	9900	11000	7700	8800	9900	11000	7700	8800	9900	11000	7700	8800	9900	11000	12329	13350	14247	15233	12663	13576	14487	15479
	VF300	118.3	114.1	88.0	87.4	53.5	39.6	40.1	52.1	8/8	7700	8800	9900	11000	7700	8800	9900	11000	7700	8800	9900	10890	7700	8800	9900	10890	12386	13407	14304	15288	12720	13633	14544	15524
	VF315	124.2	120.0	91.5	90.9	57.0	43.1	43.7	55.6	8/8	7700	8800	9900	11000	7700	8800	9900	11000	7590	8800	9900	10780	7700	8800	9790	10780	12430	13451	14346	15327	12764	13675	14586	15574
	TF370	146.9	144.6	80.1	79.5	32.0	31.8	44.8	42.3	8/8	7700	8800	9900	11000	7700	8800	9900	11000	7260	8470	9350	10340	7260	8470	9350	10340	12804	13825	14733	15638	13145	13981	14978	15866
3-Stage Full Free Lift	TF400	158.7	156.4	84.1	83.5	35.9	35.7	48.8	46.2	8/8	7590	8580	9570	10450	7590	8690	9570	10450	7150	8250	9240	10120	7260	8250	9130	10120	12870	13891	14799	15695	13211	14047	15044	15929
	TF430	170.5	168.2	88.0	87.4	39.8	39.6	52.7	50.2	8/8	7480	8580	9570	10560	7480	8690	9570	10560	6930	8140	9130	9900	7040	8140	9130	9900	12938	13959	14868	15790	13279	14115	15112	15974
	TF450	177.6	175.3	90.4	90.2	42.2	42.0	55.1	52.5	8/8	7370	8580	9460	10450	7480	8690	9460	10450	6930	8140	8910	9790	7040	8140	8910	9790	12980	14001	14909	15787	13321	14157	15154	16014
	TF470	185.8	183.5	93.9	94.1	45.7	45.5	58.6	56.1	8/8	7260	8470	9350	10230	7370	8580	9350	10340	6820	7920	8800	9680	6820	7920	8800	9680	13059	14080	14989	15838	13400	14236	15235	16067
	TF500	197.6	195.4	97.8	97.2	49.7	49.5	62.6	60.0	8/6	7150	8250	9130	10120	7260	8250	9240	10120	6710	7700	8580	9570	6820	7810	8890	9570	13112	14131	15039	15893	13451	14287	15286	16122
	TF550	217.3	215.0	104.9	104.3	56.8	56.6	69.6	67.1	8/6	6820	7920	8800	9790	7040	8030	8910	9900	6050	7370	8030	9240	6600	7590	8360	9240	13246	14267	15176	16007	13585	14421	15420	16236
TF600	237.4	235.1	112.0	111.4	63.9	63.6	76.7	74.2	8/6	5720	6710	7260	8130	6820	7700	8580	9570	5390	6380	6820	7690	6380	7260	8030	9020	13396	14417	15325	16097	13737	14573	15569	16324	


*Standard

Load Capacity


35L-7A




40L-7A

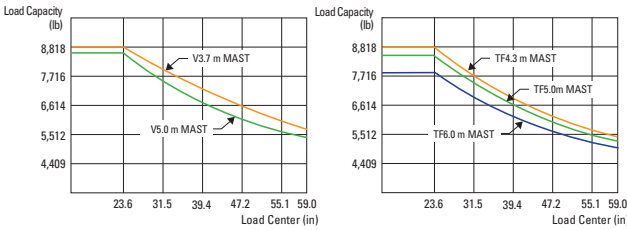

45L-7A



50L-7A

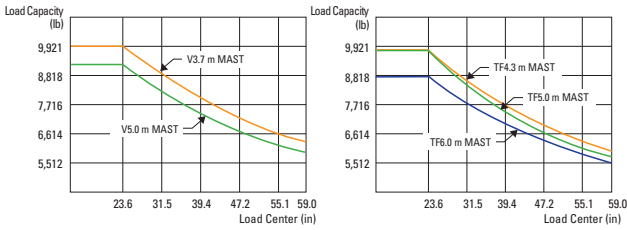

Optional Items

- CABIN
 - SIDE SHIFT
 - INTEGRAL FORK POSITIONER
 - FORK : 54 in, 60 in, 66 in, 72 in, 77 in
 - OVER SHOE : 71 in, 79 in, 87 in
 - TILTING : 8/6°, 8/8°
- TIRE : Cushion, No-marking, Double
 - SEAT : Pocket, Arm Rest, Hip Rest
 - LPG CLAMP : Swing Out
 - M.C.V : 4-Spool
 - ATTACH PIPING : 3 Spool-piping, 4 Spool-piping
 - MASTER SWITCH
- BEACON LAMP
 - HAZARD SWITCH
 - BRAKE PEDAL

Hydraulic Booster (w/o Accumulator)